




MOSIN NAGANT

INSTALLATION INSTRUCTIONS

Thank you for purchasing this Timney Trigger. It has been designed and manufactured to provide you with a lifetime of dependable service. Each trigger is hand tested and calibrated on an action specific to your platform before leaving our factory. Please read these instructions fully before you begin installing the trigger, you'll be glad you did.

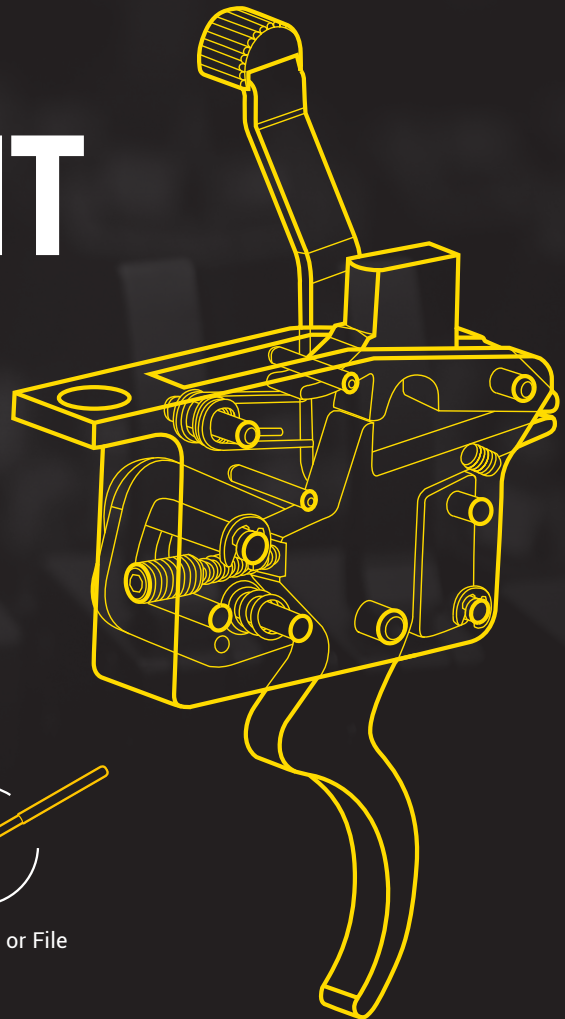

TOOLS NEEDED:



Standard
Slotted Screwdriver



3/16" Hex Wrench



Lipstick or
Inletting compound



Rotary Tool or File

TIMNEY TRIGGER GUARANTEE

Material and workmanship: This Timney trigger has been carefully inspected, tested and adjusted to give a lifetime of dependable service. Every possible care has been exercised in its design and construction. If any defect in workmanship or material should develop under conditions of normal use and service, any necessary repairs, including parts and labor will be made at NO CHARGE to the purchaser providing that our inspection reveals parts were not damaged through accident, alteration, misuse, abuse or other causes beyond our control. We neither assume nor imply any oral or statutory warranties, and we neither assume nor authorize any person to assume for us any obligation or liability in connection with this trigger. Repairs or disassembly of this trigger in any manner without specific authorization, voids the guarantee.

IF YOU HAVE TROUBLE CHECK OUT TROUBLESHOOTING STEPS ON WWW.TIMNEYTRIGGERS.COM OR CONTACT US

Need help with your install? Contact our customer service team via phone or email for assistance.

Phone: 623-223-1111 Fax: 623-223-1112 Support: technicalsupport@timneyusa.com

INSTALLATION INSTRUCTIONS

1 Before beginning work on any firearm, it must first be made safe. While pointing the firearm in a safe direction, remove the ammunition source (if present) and open the action. Visually and physically check the chamber and action to ensure the weapon is unloaded. Remove any magazines or ammunition from the work area.

2 Remove the action from the stock. This may also require removing barrel bands.

3 Remove bolt from action by holding the rigger to the rear, opening bolt and pulling it free of the action.

4 Drive out the trigger pin and remove the trigger / sear screw. (DIAGRAM A)
NOTE: DIAGRAM B shows the parts you must keep and the parts you can discard.

5 Insert trigger pin and trigger screw. (DIAGRAM C)

6 Use Hex wrench to tighten trigger pin set screw. (DIAGRAM D)

7 Insert bolt and test trigger and safety.





8 Compare trigger to stock and mark areas that need relieved.

9 Using a Dremel tool, remove enough wood so the trigger assembly will partially insert. Coat trigger housing with lipstick and press action into stock. Remove action and relieve stock in areas marked with lipstick until action fully seats in stock.

10 Make sure to relieve the stock for the safety bar on the inside of the stock (DIAGRAM G) and at the top edge where the safety protrudes. (DIAGRAM H)

11 After good fit is achieved, assemble and test trigger and safety.

12 You are now ready to enjoy your new Timney Trigger

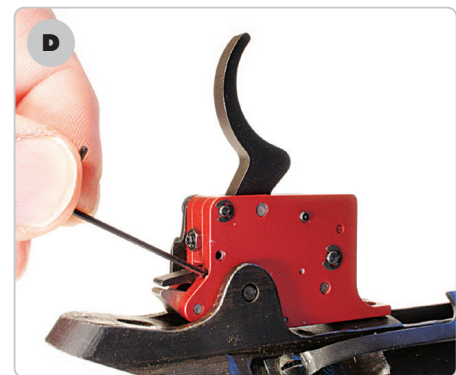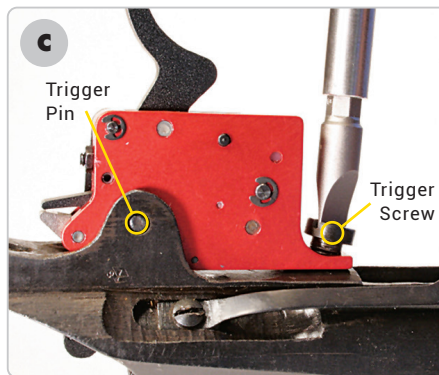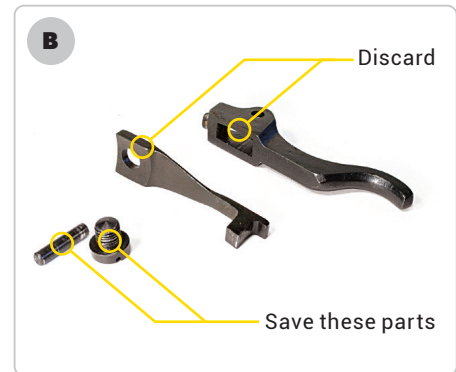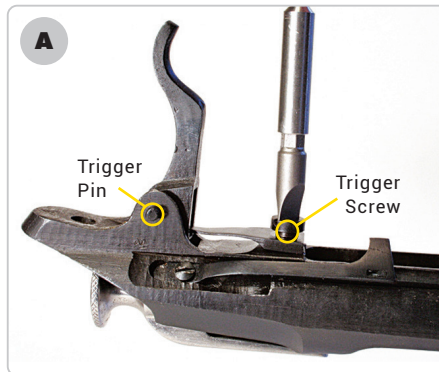

IF YOU HAVE TROUBLE CHECK OUT TROUBLESHOOTING STEPS ON WWW.TIMNEYTRIGGERS.COM OR CONTACT US

Need help with your install? Contact our customer service team via phone or email for assistance.

Phone: 623-223-1111 Fax: 623-223-1112 Support: technicalsupport@timneyusa.com

